



SafeSite Facilities

On Ground Steel Hoarding

Specification Sheet



On Ground Steel Hoarding

This type of hoarding system is installed directly on the ground without any portion being buried. The steel panels are connected to each other using frames or braces and ballast is used to hold the hoarding in situ.

Our On Ground hoarding systems provide an excellent short-term solution in urban areas where hoarding is located on pavements, roads or other areas where excavation cannot take place. It is ideal for sites with a limited budget as there are no additional costs for hard digging.

In contrast to our In Ground steel hoarding, the 'anchor' point is above the surface with anti-slip feet ensuring the hoarding is held in place.

This is a simple, cost-effective and robust powder-coated perimeter hoarding system. The hoarding sits on the ground as opposed to being placed directly into it. The system comes in both 2m and 2.4m heights and the hoarding is designed and built with reusable and fully recyclable materials.

Hoarding Panels are commonly used to increase site security and are quickly assembled to secure unsafe areas with staff and equipment. Two people are required to lift the system and a single connection can be made in as fast as five minutes! Access points can be created by inserting a pedestrian or vehicle gate.

The specifications and dimensions for the On Ground hoarding are the same as our other types of hoarding.

Key Features

- > Cost effective: Compared to the in-ground option, on ground steel hoarding is generally more cost-effective due to reduced installation requirements.
- > Easy to reposition or relocate as required
- > Straight forward to install
- Infill panels also available to fill gaps on hoarding panels.





Size and dimensions

Measurements in mm


Length	Height	Weight (kg)	Product ID
2133	2000	30	THS111050
2133	2400	34	THS111100

Vehicle & pedestrian gates

Vehicle Gates

Easy access to a site can unintentionally cause unwanted access but SafeSite's vehicle gate attachment provides a solution to this issue. Our vehicle gates come in many sizes, from 4 to 7 metres long. Weight varies from 65kg to 85kg.

Designed and manufactured from powder-coated and galvanised steel, the gates enhance visibility and safety and can support visual aids such as signage or warning notices.

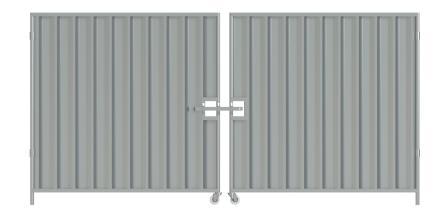

Pedestrian Gates

SafeSite's Pedestrian Gates provide a convenient short or long-term entry point whilst maintaining round the clock site security. The pedestrian gate has a sliding bolt latch which can be fastened in place to secure the complex even when unattended.

The pedestrian gates weigh 17kg and are compatible with all our other hoarding and fencing products.





Installation parts

You will need the following components to successfully install the hoarding:

On Ground Steel Hoarding- Measurements in mm

TFS100500 / TFS100520 Couplers



Length	Width	Height	Weight (kg)
N/A	N/A	N/A	-

TFS101610 -21mm Socket Spanner



Length	Width	Height	Weight (kg)
290	30	30	0.4

THS111700 / THS111710 2m / 2.4m Hoarding stabiliser



Length	Height	Weight (kg)	
1487	45	3.2	

THS111720 - HD Block tray



Length	Width	Height	Weight (kg)
1300	500	500	-

TFS100730 - Hi-Vis Concrete **Ballast Block**




TFS100706 - Concrete Blocks





Length	Width	Height	Weight (kg)
609	300	295	44



Length	Width	Height	Weight (kg)
520	260	210	20



Length	Width	Height	Weight (kg)
440	100	215	18



Length	Width	Height	Weight (kg
770	190	120	13.5



Installation parts

You will need the following components to successfully install the hoarding:

On Ground Steel Hoarding- Measurements in mm



Length	Width	Height	Weight (kg)
140	15	1910	2.6



Length	Width	Height	Weight (kg)
140	15	2310	3.2



Unit 1, Martello Enterprise Centre, Courtwick Lane, Littlehampton, West Sussex, BN17 7PA



info@safesitefacilities.co.uk



www.safesitefacilities.co.uk

The product information included in this document is correct at the time of print. Some of the details and specifications featured may change without prior notice. Please visit our website or contact our sales team for the most up-to-date information.