



## Free-Standing Timber Hoarding

---

Specification Sheet

16/04/26

**safesite**<sup>®</sup>  
F A C I L I T I E S

[safesitefacilities.co.uk](https://safesitefacilities.co.uk)



## Free-Standing Timber Hoarding

Create a secure and professional perimeter for your construction site with our above-ground timber hoarding.

On some sites it's simply not feasible to install in ground construction hoarding. We understand the technical intricacies of a site perimeter and perform a full assessment that considers key factors such as wind loading, project duration and budget.

The free-standing timber hoarding that we install is supported by the right ballast system for your site, such as concrete blocks, to ensure a safe, secure, and suitable perimeter protection. The hoarding can be painted in any colour, as well as finished in special products such as anti-climb paint.

The timber materials we use are ethically sourced from sustainable forests which are both FSC and PEFC approved suppliers. We offer our products and services nationwide and have built a business on a reputation you can trust.



## Key Features

- Fitted in accordance with structural engineer measurements
- Assured safety for anyone in or around the site perimeter
- Corporate colours and branding available
- No digging required
- High security construction
- Deters vandals from site
- Provides total privacy

Option with Anti-Climb Spikes



Option for hoarding lights



Legato blocks on timber hoarding



Face side of hoarding can be painted





## Free-Standing Timber Hoarding

The images feature here show how highly professional and secure, free-standing hoarding can be.

In addition to adding to overall site security, the hoarding can be moved and relocated as work progresses. The timber can be decorated or painted according to company brand needs or community projects and outreach.

The most appropriate ballast is recommended to stabilise and support the hoarding panels, ensuring complete peace of mind throughout the construction process.

We offer a complete end to end solution for site protection and offer several products, services and accessories to add to site security and safety.

Hoarding with anti-climb paint



Hoarding in Brighton



Hoarding painted in company colours



Legato blocks supporting hoarding






# Free-Standing Timber Hoarding Vehicle Gate

It is a common requirement for most site to facilitate vehicular access, SafeSite Facilities is able to provide a vehicle gate bespoke to your sites needs.

As a standard we provide gates that are 4.2m in width and 2.4m in height, but if there is a requirement outside of this specification, then this can be made to measure and custom to the sites needs.

The Vehicle Access Gate can be painted in any RAL colour, giving the client the option the add the companies brand to site perimeter.

2.4m x 4.2m SiteGard™ Double Leaf Gate - Mesh Clad - Black RAL 9005

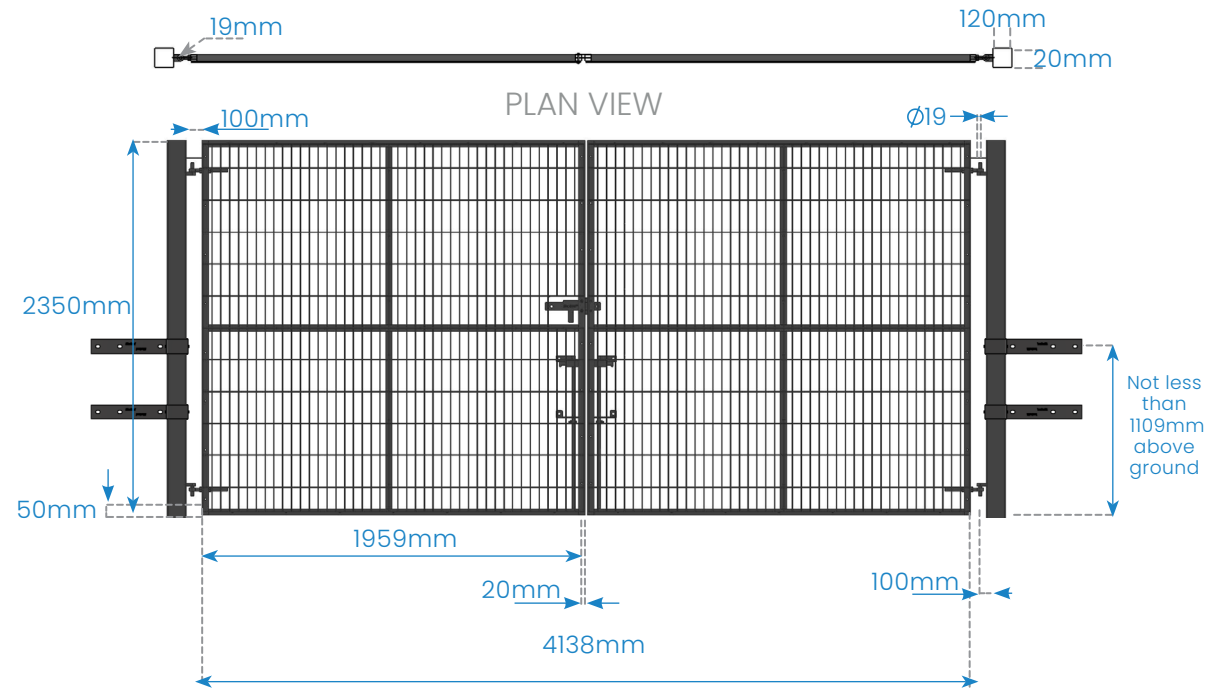

## Vehicle Hoarding Gate Specification

Description	Size (mm)
THGS018 - 4m Vehicle Hoarding Gate	H2400 x W4138
THGS022 - 5m Vehicle Hoarding Gate	H2400 x W5026
THGS026 - 6m Vehicle Hoarding Gate	H2400 x W6138



Double Leaf Gate



Vehicle Access



# Free-Standing Timber Hoarding Pedestrian Gate

Pedestrian access is a common requirement for most sites, and SafeSite Facilities provides bespoke pedestrian gates tailored to your specific needs.


Our standard gates measure 1.3m in width and 2.4m in height, but we also offer custom-made solutions to accommodate site-specific requirements. Pedestrian gates can be finished in any RAL colour, allowing clients to incorporate their company branding into the site perimeter.

These gates can be connected to create a continuous partition, enhancing site security. Made from steel, they are lightweight, easy to transport, and simple to install while offering exceptional durability in outdoor environments.

Additionally, single-leaf pedestrian doors can be integrated with a door blank in timber hoarding, ensuring a secure and seamless hoarding line without encroaching on the site.



PLAN VIEW

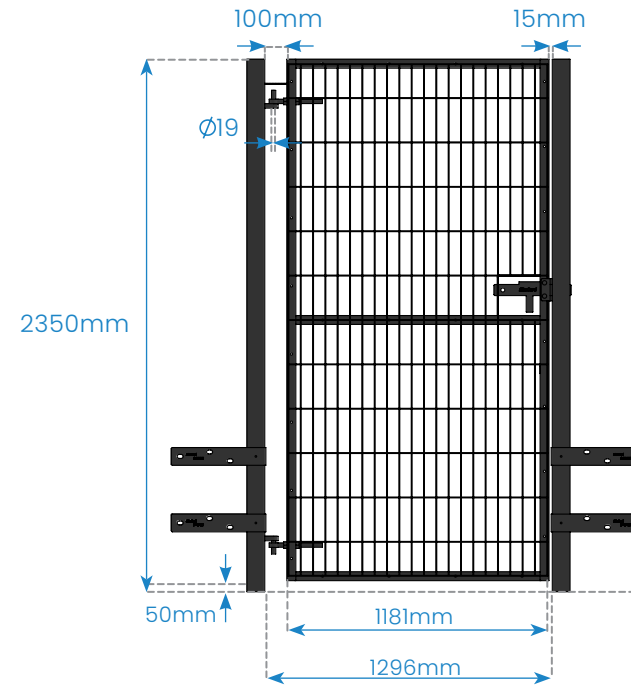

FRONT VIEW



Single Leaf Gate with Door Blank Timber Hoarding



## Pedestrian Hoarding Gate Specification

Description	Size (mm)
THGS001 - Pedestrian Hoarding Gate	H2400 x W1296

# Technical Details

Drawing Title: 2.4m HIGH TIMBER HOARDING  
 - SURFACE MOUNTED TO CONCRETE BLOCK  
 (800mm x 800mm x 800mm)

This is an example technical drawing for a  
 hoarding installation carried out  
 by SafeSite Facilities Ltd

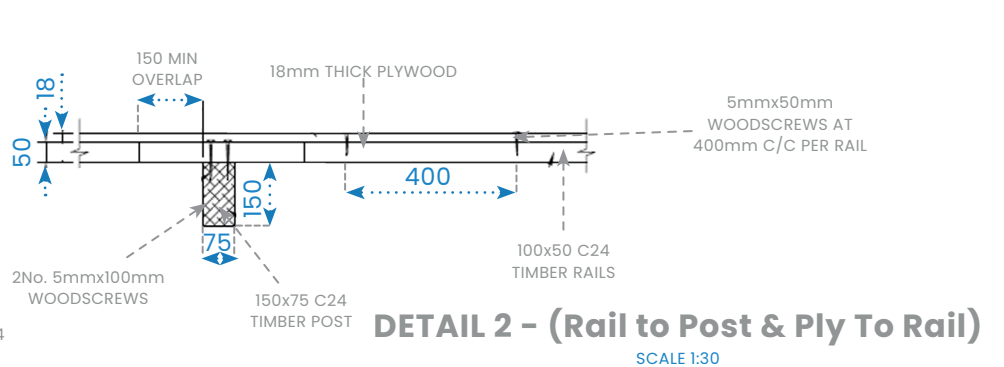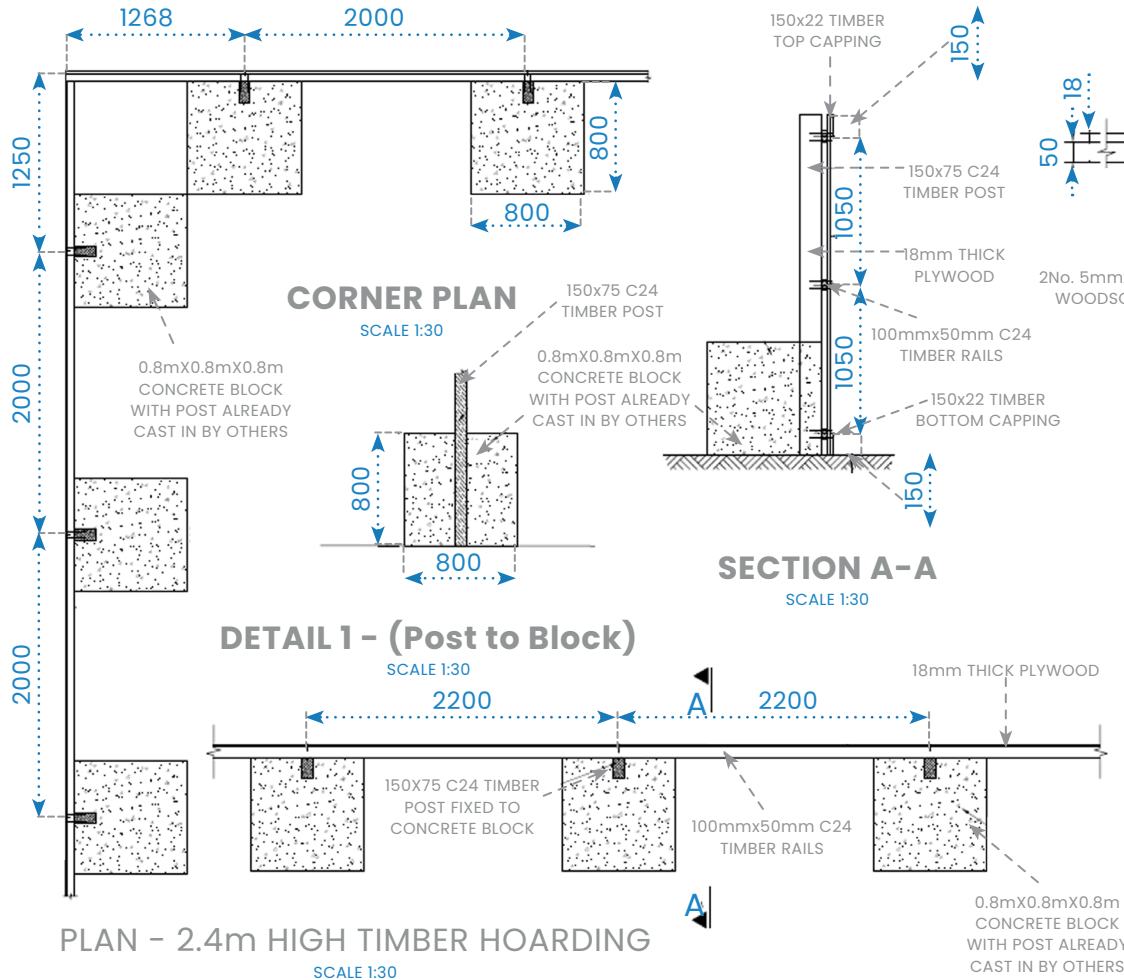

- NOTE: - POST INSTALLED AT 2m C/C FOR THE FIRST 4.5m LENGTH OF HOARDING AND 2.2m C/C THERE AFTER.
- NOTE: - TIMBER HOARDING HAS BEEN DESIGNED FOR A MAXIMUM NET WIND PRESSURE OF 0.4988kN/m<sup>2</sup>
- NOTE: - TIMBER HOARDING MAINTENANCE IS THE SOLE RESPONSIBILITY OF THE MAIN CONTRACTOR / CLIENT

- NOTE: - TIMBER HOARDING HAS NOT BEEN DESIGNED FOR THE FOLLOWING
  1. VEHICLE IMPACT LOADINGS
  2. AS A RETAINING STRUCTURE
  3. CROWD LOADING
- NOTE: - COMPACT LEVEL GROUND RESPONSIBILITY OF THE MAIN CONTRACTOR
- NOTE: - HORIZONTAL RAIL SPACING ARE APPROXIMATE

Connection Detail		
RAIL - POST	5mm x 100mm WOOD-SCREW	2
PLY - RAIL	5mm x 50mm WOODSCREW	4x SCREW PER EACH RAIL
TRIM - PLY	3mm x 40mm DRYWALL	400mm C/C Capping/Skirting Stagger
		500mm C/C 4No Joint Ship Into Rails