


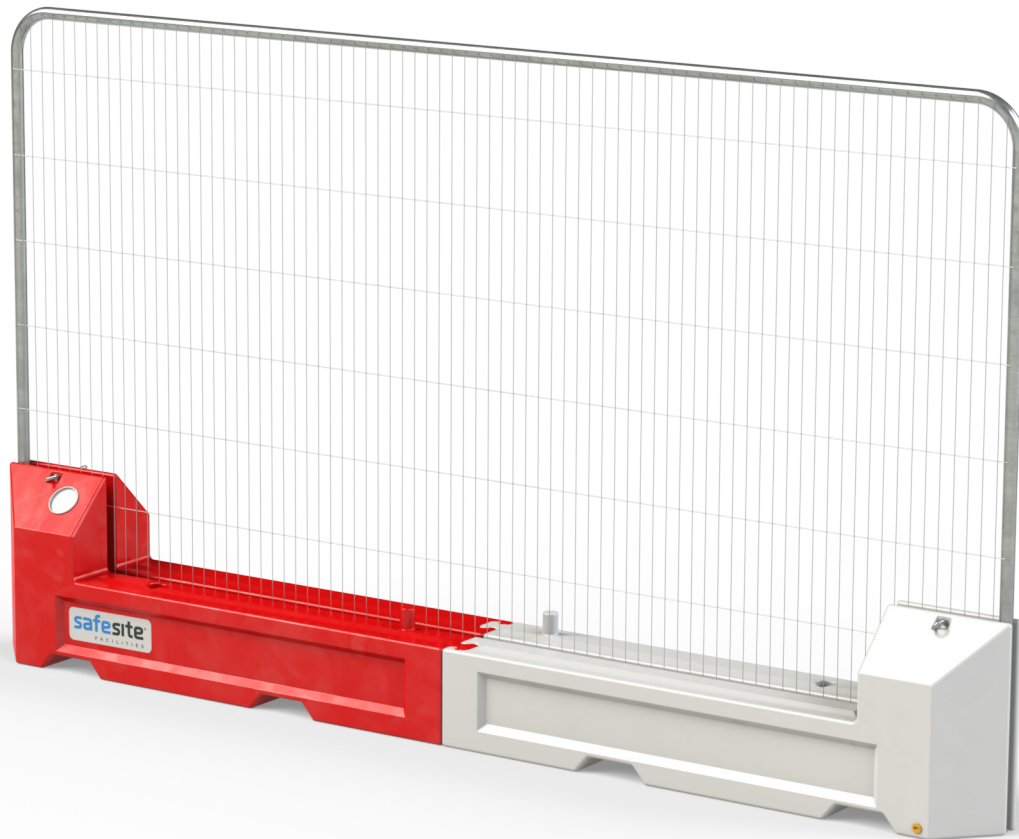

SlotBlock Barrier

Specification Sheet
WFS151300

12/10/26

safesite[®]
F A C I L I T I E S

safesitefacilities.co.uk



SlotBlock Barrier

SlotBlock water-filled base barriers are fully compatible with industry standard mesh panels. They offer high-visibility protection, flexible deployment and superior wind resistance. Ideal in situations where temporary fencing is required, they can rotate through 45° for a versatile layout.

SlotBlocks are relatively lightweight at only 14kg each when unfilled which helps enable quick and easy deployment and assembly – despite being lightweight when unfilled two fully filled interlocked SlotBlocks will achieve a weight of 320kg. In addition to the heavy base extra stability is gained by a robust eyelet screw and bolt system which clamps the mesh fence panel in place.

They are ideal in a variety of situations where temporary fencing is required, such as emergency maintenance or repair. These barriers offer multiple uses across sites.



Two interlocking Barriers




SlotBlock Barriers on-site

SlotBlock Barrier Specification

Description	Size (mm)	Weight (kg)	Filled Weight (kg)
WFSI51300 – SlotBlock Barrier	H1000 x W1750 x D400	14	160
TFSI00050 – Heavy Duty Round Top Anti-Climb Fencing Panels	H2000 x W3450 x D40	14.1	–
TFSI00110 – Standard Fencing Panels	H2025 x W3450 x D40	10.5	–
TFSI00130 – Anti-Climb Fencing Panels	H2025 x W3450 x D40	12.2	–

Key Features

- Rotates 45° degrees
- Wind resistance up to wind speeds of 57mph
- Reflective strips can be added for increased visibility
- Compatible with pedestrian and vehicle gates
- Width 2 barriers joined: 3.5m – Weight Combined: 320kg
- Pallet stack quantity: 20 barriers (10 pairs)

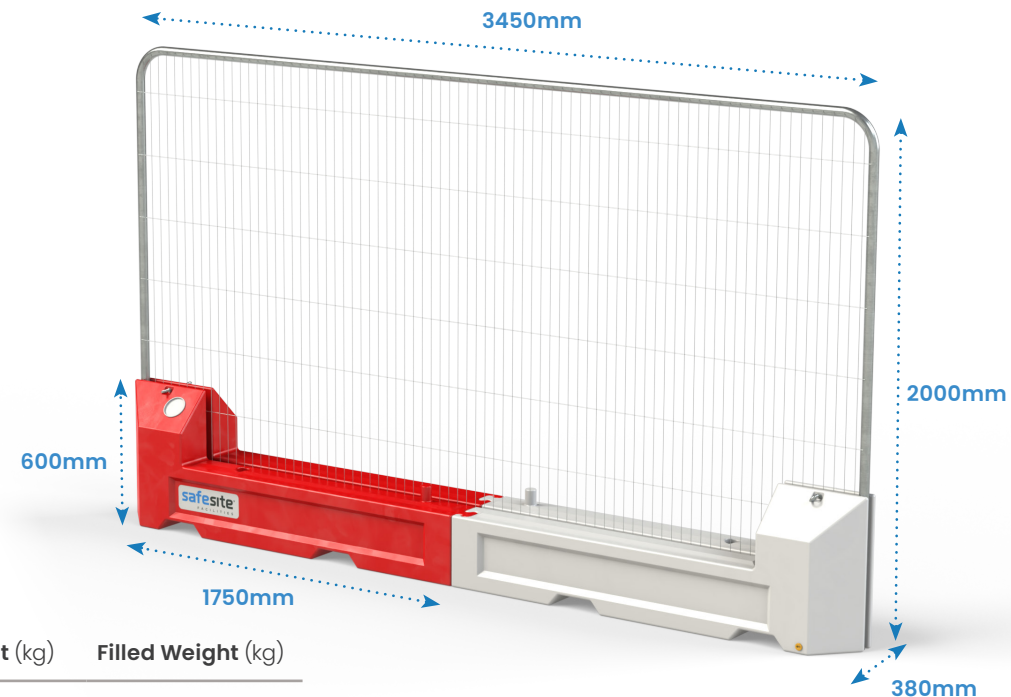



57 mph

Wind speed withstood, not to failure point.

Wind Resistance

The SlotBlock Barrier with mesh fence has been rigorously tested within the MIRA wind tunnel, and achieved a Class B pass.

With the wide 3450mm span of the water filled slot block base forming a solid footing the inserted fence can withstand wind speeds of up to 57mph.




SlotBlock Barrier Units with Fencing






Technical Details

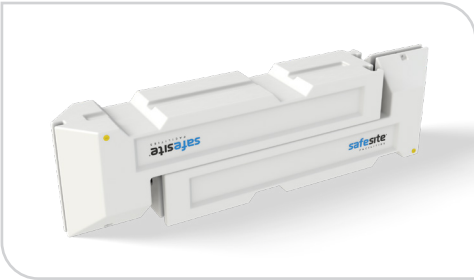

Easy to stack utilising the moulded fittings and holes which form insertion points when stacking and loading




Eyelet screw & bolt for securing fence

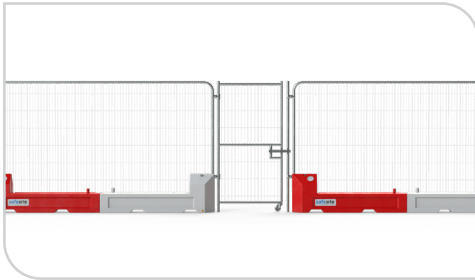

Compatible with pedestrian and vehicle gates

TFS100050 Heavy Duty Round Top Anti-Climb Fencing Panels

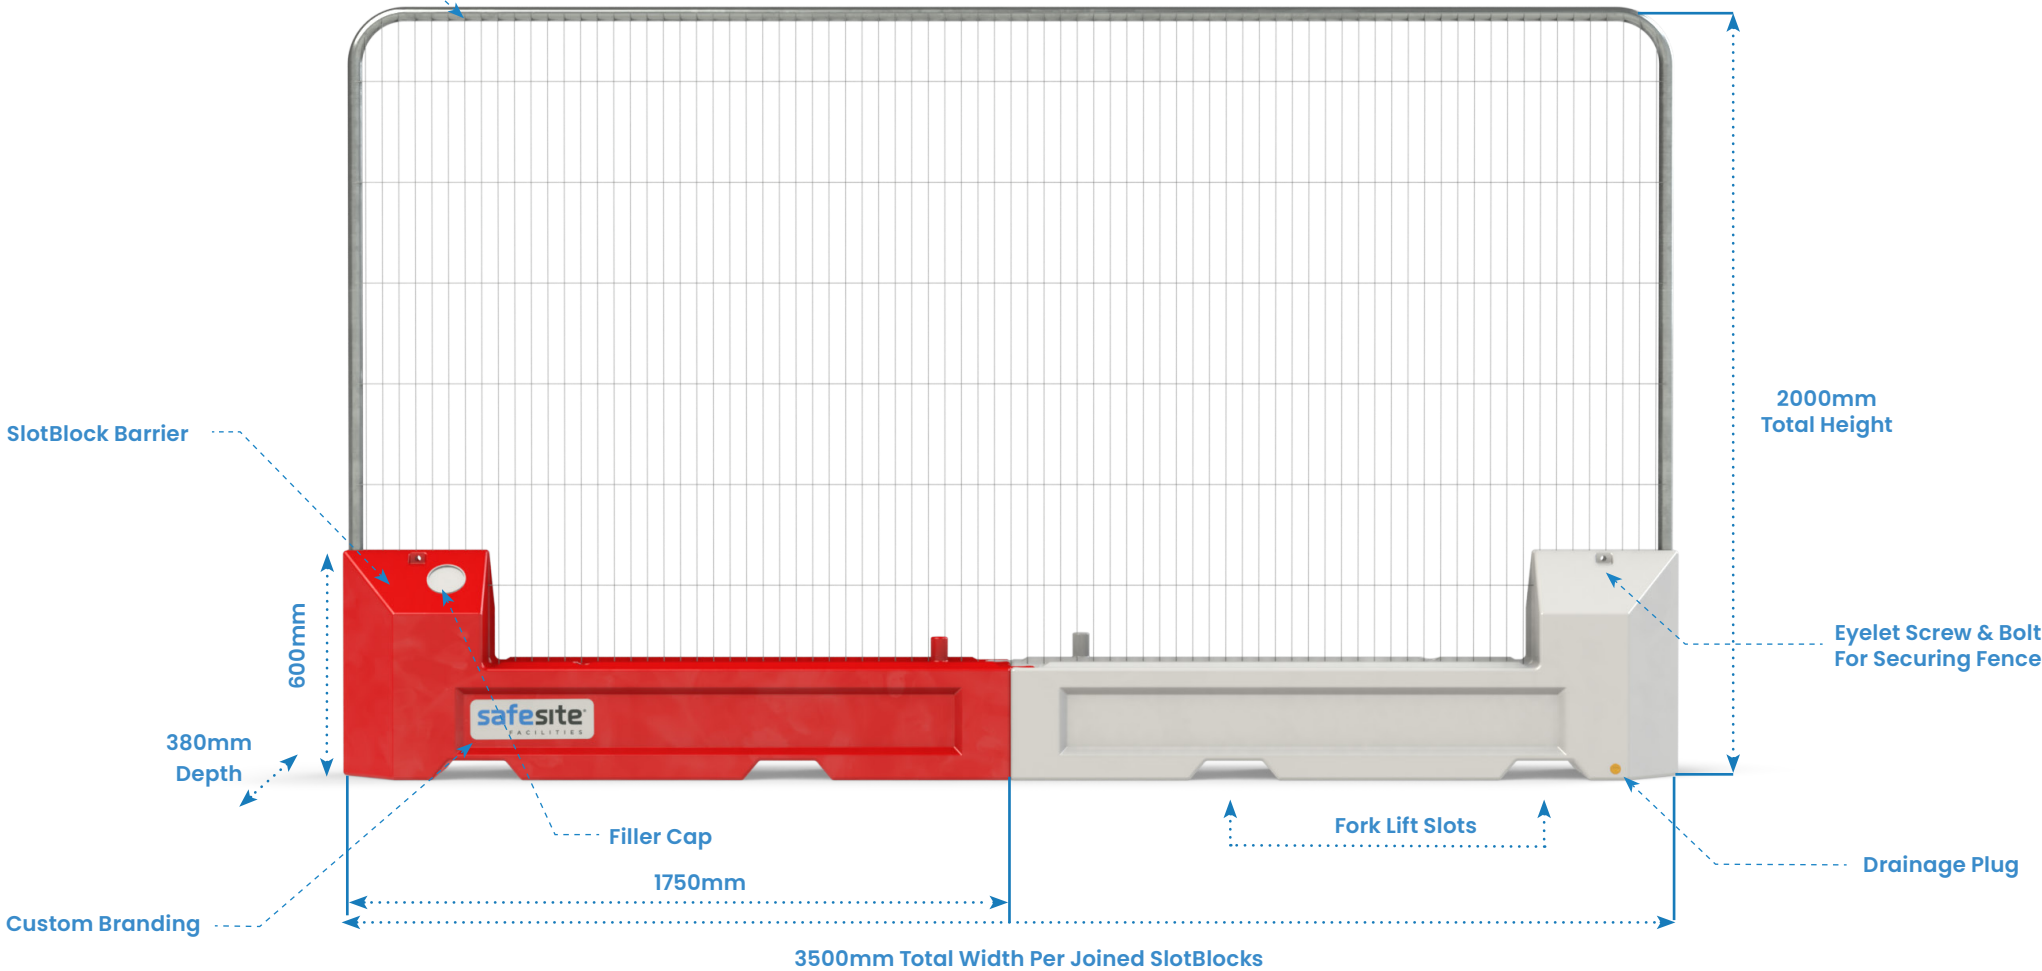



Installation parts

SlotBlock Water Filled Barrier – Measurements in mm

Standard parts: Please see below pictures and quantities of additional parts you will receive with each SlotBlock Barrier, the parts below are an essential safety requirement when installing the SlotBlock correctly.

1 Drainage plug
Quantity: 1



Size (mm)	Weight (kg)
H65 x W65 x D28	-

2 Filler cap
Quantity: 1



Size (mm)	Weight (kg)
H20 x W100 x D100	-

3 Eyelet Screw, Bolt & Washer
Quantity: 2 (Per 2 Barriers)



Size (mm)	Weight (kg)
W17 x D50	-

1 TFS100500 Galvanised Fence Coupler
Quantity: 2



Size (mm)	Weight (kg)
H26 x W136 x D78	0.2