


safesite[®]

F A C I L I T I E S

SafeKerb

SPECIFICATION SHEET

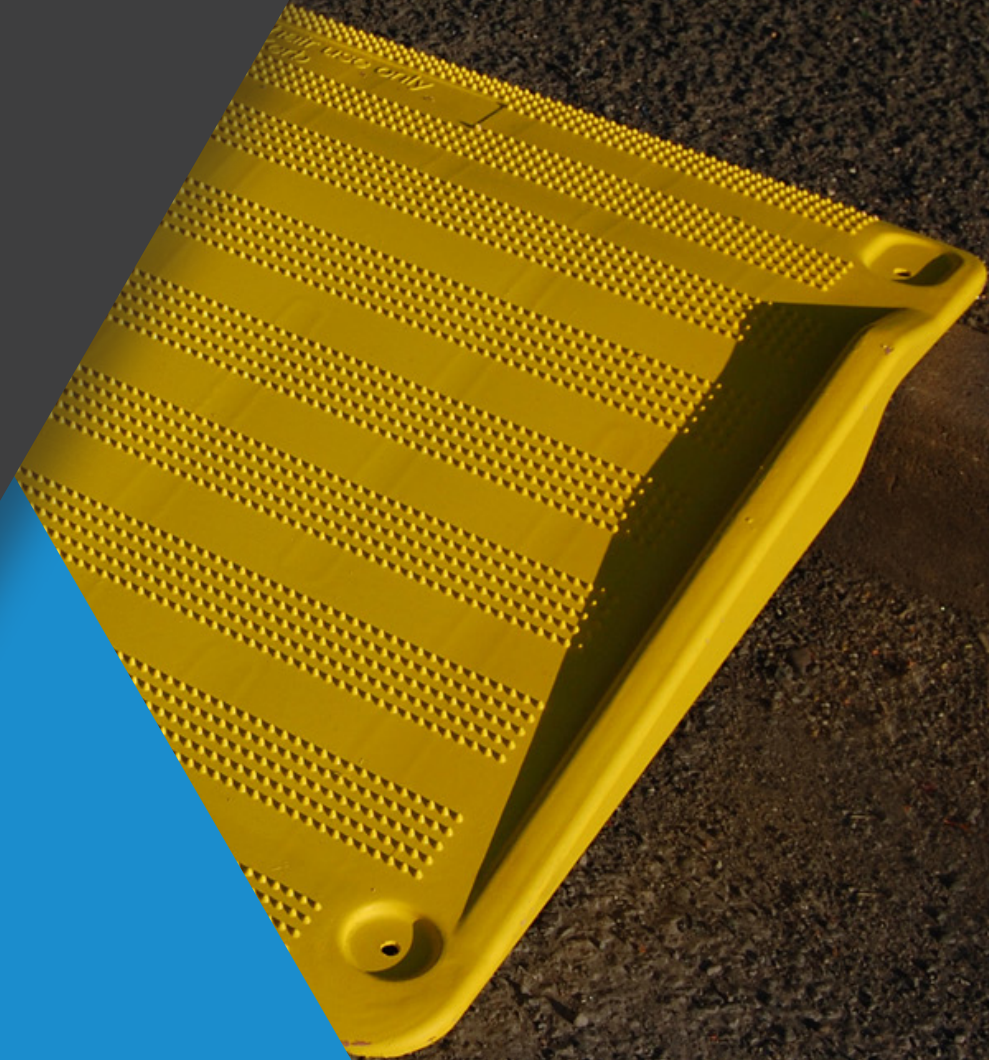

SafeKerb

SafeKerb is a strong, lightweight access ramp that can be deployed and installed by one person.

Made from high-density polyethylene ensures the ramp can be mounted simply, while their raised sides provide additional safety for users.


Fully compliant with Wheelchair Boarding Ramp Specifications, the Safety at Street Works' Code of Practice and the Disability Discrimination Act.

SafeKerb Specification

Length (end to end)	1265mm
Length (between side guards)	1215mm
Width	747mm
Height	112mm
Weight	6kg

Key Features

- Recommended to be bolted down for maximum stability and security
- The wider access makes the product convenient and easy to use
- Adapts to varying kerb or step heights (60mm to 160mm)
- Compact stacking for easy transport & storage
- Made from high-density polyethylene (HDPE)
- Can support a weight up to 250kg
- 100% recyclable
- Nationwide delivery





SupaGrip

The SupaGrip ramp can take loads up to 350kg, making it suitable for wheelchairs, mobility scooters, foot traffic and many more.

The SupaGrip exceeds the requirements of the 'Wheel Chair Boarding Ramp Specification', the 'Safety at Streetworks Code of Practice' and the 'Disability Discrimination Act'.

Key Features

- Made from High-density polyethylene (HDPE)
- Compact stacking for easy handling
- Allows for water to run along gutter
- Adapts to 60-160mm kerb heights
- Can support loads up to 350kg
- Has a slip-resistant surface
- Stable without bolting
- Anti-slide edging
- 100% recyclable
- Nationwide delivery

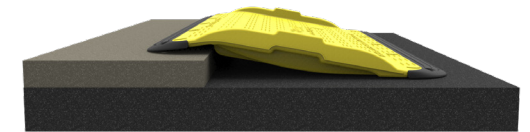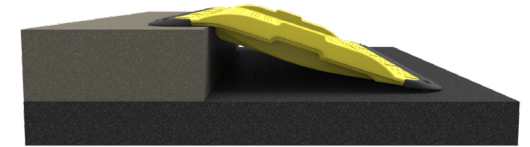

Supports Loads Up To 350kg



Adapts To Varying Kerbs



Technical Details

Weight 6kg

