

Site-Wall Barrier

Specification Sheet WFS151200

15/02/24





Site-Wall Barrier

Available for purchase or hire and delivered nationwide, our heavy duty water filled Site-Wall barriers are ideal for ensuring security at construction sites, outdoor events and more.

Our durable, UV stabilised HDPE Site-Wall barriers are easy to deploy and move when empty, yet weigh a sturdy third of a ton (300kg) each when used with fencing and filled with water (sand can be used alternatively, if preferred).

The ingenious interlocking design of these barriers allows one continuous, and therefore less vulnerable wall to be constructed, even around corners without any compromise in strength.



Line of Site-Wall Barriers




Site-Wall Barrier with Mesh Fence

Site-Wall Barrier Specification

Description	Size (mm)	Weight (kg)	Weight Full (kg)
WFS151200 - Site-Wall	H6500 x W1600 x D400	14	300


Key Features

- > 300kg when filled with water
- Allows for angles or curves
- > Can be used with mesh fence
- Interlocking design
- > Easy to handle and install
- UV stabilised HDPE
- Creates a safe boundary

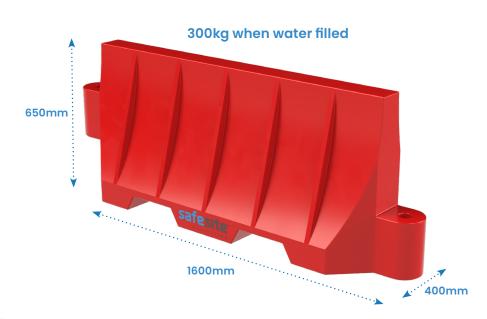



Technical Details

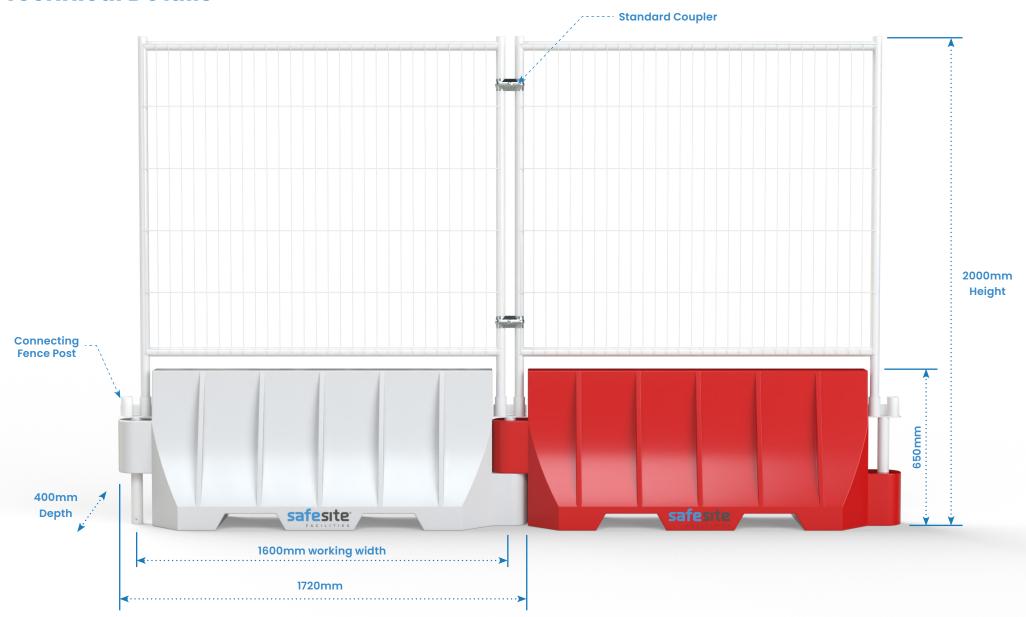


Installation parts Site-Wall Barrier Barrier - Measurements in mm

Please see below pictures and quantities of additional parts you will receive with each Site-Wall Barrier. The parts below are an essential safety requirement when installing the Site-Wall correctly.



Quantity: 1



Size (mm) Weight (kg) H1585 x W1530 x D38

Connecting Fence Post WFS151230 Quantity: 1



Size (mm) Weight (kg) H534 x W140 x D50 2.4

Standard Coupler TFS100500 Quantity: 2



Size (mm) Weight (kg) 0.2 H50 x W130 x D52