



## 4.2m Vehicle Gate

---

Specification Sheet

TFS100300

10/11/23

**safesite**<sup>®</sup>  
F A C I L I T I E S

[safesitefacilities.co.uk](https://safesitefacilities.co.uk)




## 4.2m Vehicle Gate

Facilitating convenient vehicular entry to temporary construction sites may pose security challenges, but SafeSite's Vehicle Gates provide an optimal solution.

These vehicle gates are available in various sizes, including our 4 metre span double gate, measuring 2 metres high, with a robust frame diameter of 40mm and an overall weight of 32 kg.

## Key Features


- > Compatible with a range of standard temporary barrier & hoarding systems
- > Delivery and installation services can be included
- > Speedy installation, assembly and repositioning
- > Ideal for construction site vehicle access
- > Available in mesh and solid steel
- > Non-permanent fixing
- > Customisable options

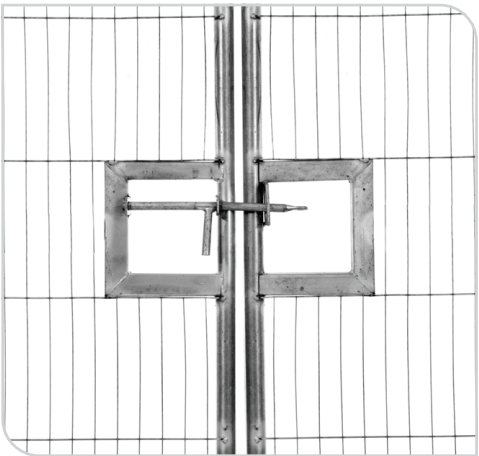

Easy To Manoeuvre Single Gate Panel



Sliding Bolt For Extra Security

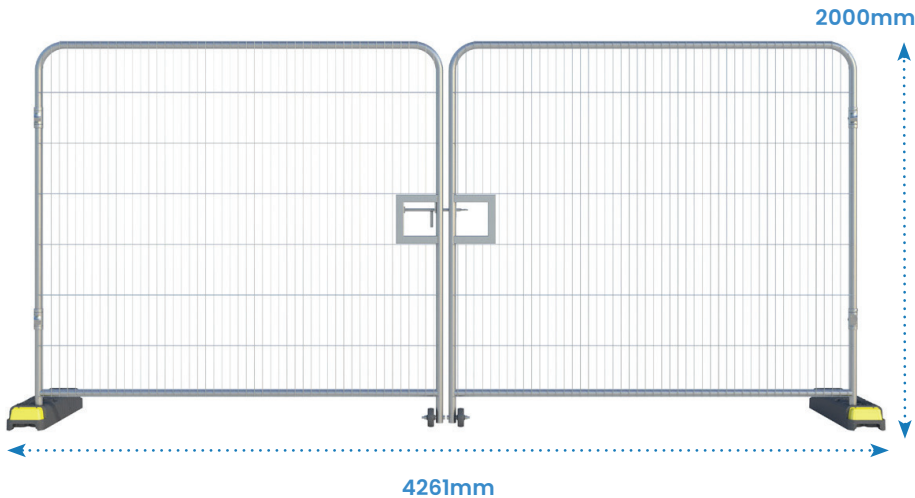

## 4.2 Vehicle Gate Specification

Description	Size (mm)	Weight (kg)
TFS100300 - 4.2m Vehicle Gate	H2000 x W4261 x D40	32





## 4.2m Vehicle Gate in Action


The images to the right show the variety of situations which the 4.2m Vehicle Gate can be implemented.

Made from weather-resistant galvanised steel, in a choice of solid and anti-climb mesh constructions, vehicle gates can be fully customised to enhance visibility and safety.

They can also carry advertising, signage and security or warning notices. The fencing sits in 18kg thermoplastic rubber feet and joined together using couplers.



**Vehicle Gate Used With Water-Filled Barriers**

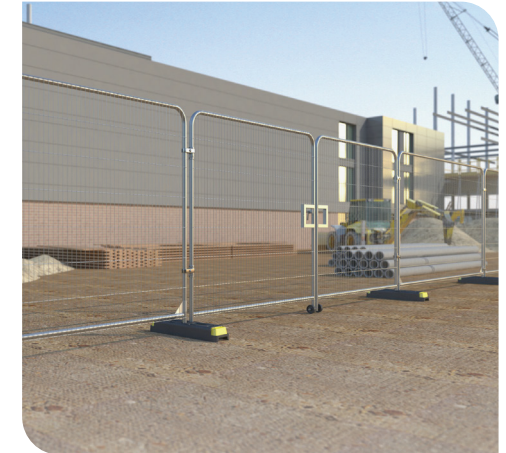

**Creates Vehicle Access Points**




**Castor Wheels Make it Easily Accessible**



**Sits in 18kg Feet for Stability**



# Technical Details

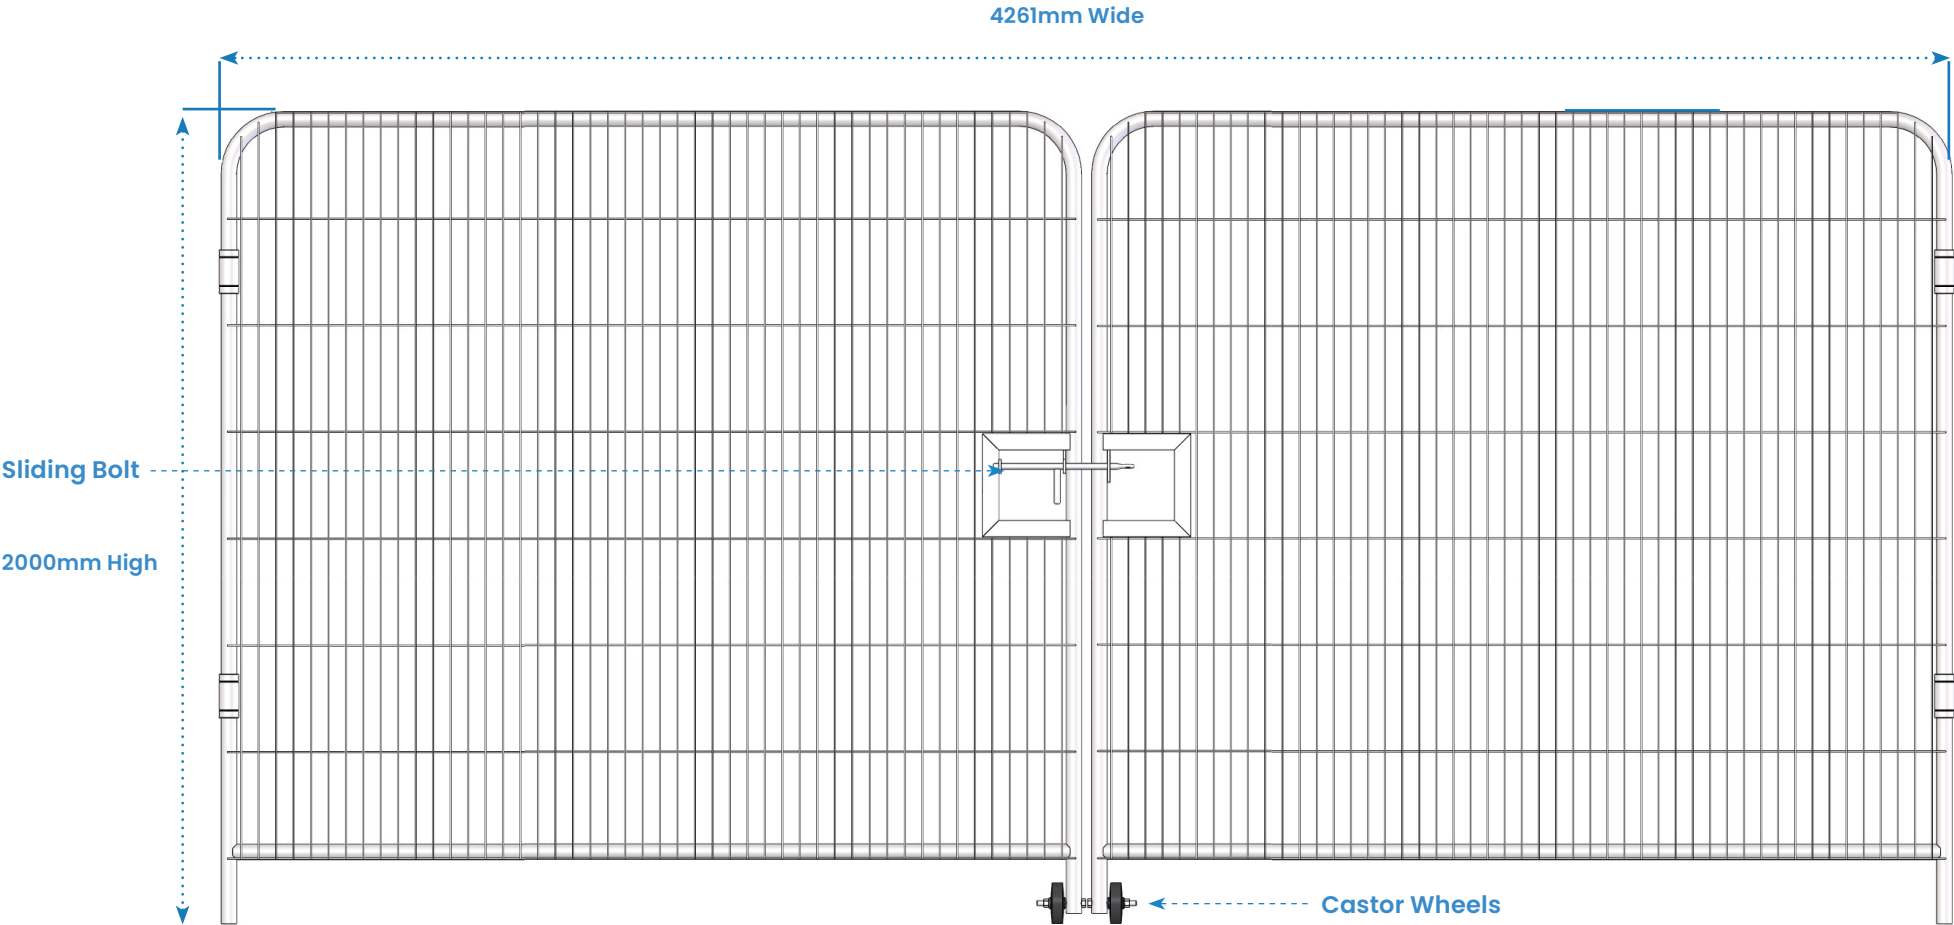



## Installation Parts

Please see below pictures and quantities of additional parts you may require with each anti-climb vehicle gate, the parts below are an essential safety requirement when installing the vehicle gate correctly.

1 x4 Coupler



2 x1 Spanner



3 x2 Regular or Hi-Vis Thermo-Plastic Feet

